


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

PARALLEL OPERATION

Parallel operation is possible with all combinations DC/DC converter versions providing they have the same rated input voltage. Use the same wire length for each power supply (star connection) and energize all units at the same time to avoid triggering overload protection. For operation with more than two power supplies in parallel operation, please contact RECOM technical support for advice.

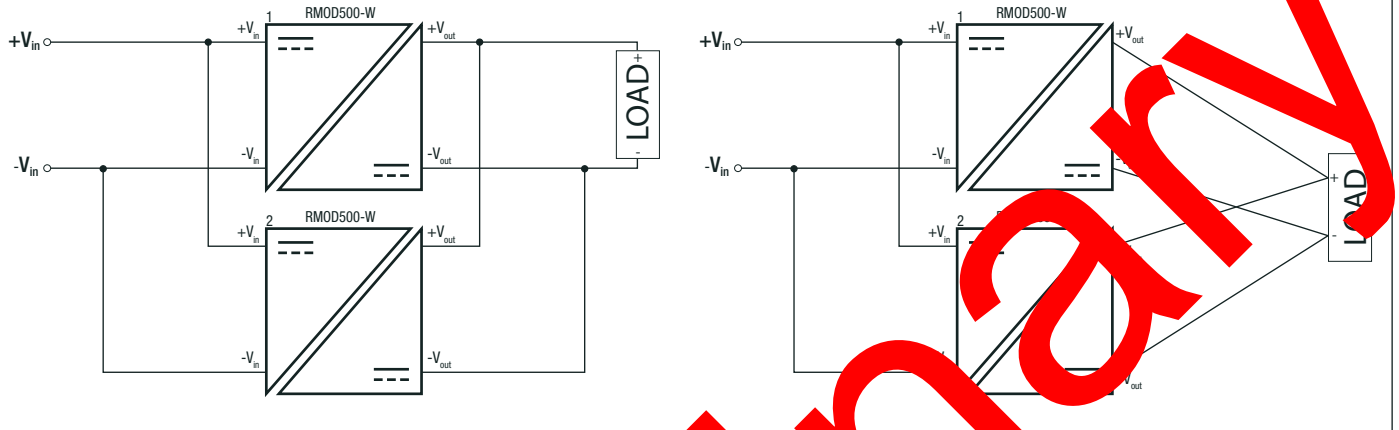

PACKAGING INFORMATION

Parameter	Unit	Value
Packaging Dimension (LxWxH)	mm	500.0 x 300.0 x 200.0mm
Packaging Quantity		6pcs
Storage Temperature Range		-40°C to +105°C

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.